

HEXA FOR™ 635

NONIONIC FLUOROSURFACTANT

DESCRIPTION

HEXA FOR™ 635 is a water-based, non-ionic fluorosurfactant that effectively reduces surface tension at very low concentrations. **HEXA FOR™ 635** is based on short-chain molecule containing 6 fluorinated carbon atoms that cannot breakdown to PFOA in the environment.

HEXA FOR™ 635 has high property in terms of dynamic surface tension, allowing the coating formulations to reach rapidly the low values of static surface tensions.

It is stable in both acidic and basic conditions, making it perfect for paint and coatings.

SPECIAL FEATURES

- ❖ Specifically for water based systems
- ❖ Good reduction of surface tension at very low concentrations
- ❖ Excellent levelling
- ❖ Fast lowering of surface tension
- ❖ Reduced orange peel effect
- ❖ Improved wetting of substrates
- ❖ Stable in acidic, alkaline, brine and hard water medium
- ❖ **HEXA FOR™ 635** is in compliance with REACH regulation.
- ❖ Meets the goals of the voluntary U.S. EPA 2010/2015 PFOA Stewardship Program
- ❖ Targeted below LOD for PFOA (**PFOA free***)

APPLICATIONS

HEXA FOR™ 635 expresses its best properties already at very low concentration (0,02 – 0,4%).

Some examples of application:

- ❖ Paint and coating
- ❖ Floor waxes and finishes
- ❖ Inks
- ❖ Industrial detergents
- ❖ Adhesive
- ❖ Plating bath
- ❖ Battery scale inhibitor

TECHNICAL INFORMATION

APPEARANCE	Yellow to amber liquid
IONIC NATURE	Non ionic
DENSITY	1,08 g/cm ³
pH	4.5 – 6.5
ACTIVE MATTER	24 – 26%
COMPOSITION	24 – 26 % active material 74 - 76 % Water

SPECIFICATION

Non volatile content 105°C 30 min: 24 – 26%
pH: 4.5 – 6.5

SOLUBILITY

Water, ethylene glycol, methoxypropanol, butyl cellosolve, dipropylene glycol methyl ether, ethanol, isopropyl alcohol, acetone



MAFLON SPA
(Società Socio Unico Soggetta all'attività di direzione e coordinamento ex art.2497 bis C.C. da parte di Mazza Holding srl)

Via Don Ravizza snc - 24060 Castelli Calepio (BG) ITALY
VAT N° IT 04080020169
C.F. 04080020169
REG.IMPRESE DI BG - REA 433424
CAPITALE SOCIALE € 500.000

Fluorochemical Specialties

Phone +39.035.4494301
Accounting Dept. Fax +39.035.4425249

<http://www.maflon.com> - info@maflon.com
Technical Dept. Fax +39.035.4494331




UNI EN ISO 9001:2008



DYNAMIC SURFACE TENSION

(0,1% of active material in deionized water at 25°C)

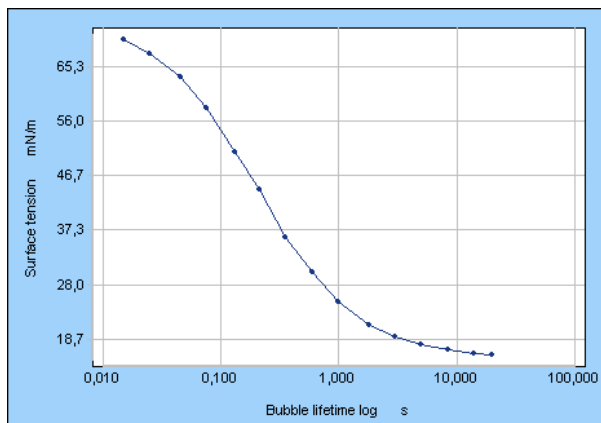

- ❖ 44.4 dyn/cm at 0,21 sec (bubble lifetime)
- ❖ 24.9 dyn/cm at 1 sec (bubble lifetime)

STORAGE AND STABILITY

HEXAFOR™ 635 is stable for two years if stored in original closed drums at temperatures of 4 – 45°C (39 – 113°F).

The efficacy of the surfactant is not impaired by freezing and thawing. However, if a freeze-thaw occurs, it is recommended that the entire contents of the container be agitated prior to use. Stable in brine and acidic/alkaline medium.

PERSONAL SAFETY

Consult the current **Safety Data Sheet** for safety use of the product.

FOAM VOLUME A 40°C (in deionized water) [ml]


(Ross-Miles test according to ASTM D 1173)

	Initial	5 min
0,15% of active matter	226	206
0,5% of active matter	295	275

SURFACE TENSION IN DEIONIZED WATER AT 25°C

(Wilhelmy plate method)

- ❖ 18,5 dyn/cm at 0,01% (active matter)
- ❖ 17,9 dyn/cm at 0,05%
- ❖ 17,9 dyn/cm at 0,1%

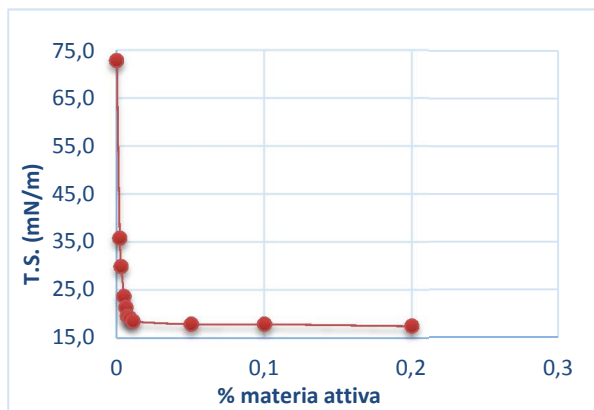

PACKAGING

- ❖ Kg 5 – Drum
- ❖ Kg 25 – Drum
- ❖ Kg 100 – Drum

* Wherever the term "PFOA Free" is used in this website, it means content of PFOA is less than limit of detection (20ppb).



MAFLON SPA
 (Società Socio Unico Soggetta all'attività di direzione e coordinamento ex art.2497 bis C.C. da parte di Mazza Holding srl)
 Via Don Ravizza snc - 24060 Castelli Calepio (BG) ITALY
 VAT N° IT 04080020169
 C.F. 04080020169
 REG.IMPRESE DI BG - REA 433424
 CAPITALE SOCIALE € 500.000

Fluorochemical Specialties
 Phone +39.035.4494301
 Accounting Dept. Fax +39.035.4425249
 http://www.maflon.com - info@maflon.com
 Technical Dept. Fax +39.035.4494331

